

PTAHAN CITY

VICTORIAN CHURCHES


118. St Martin's, cnr Cromwell Road & Wilson Street, Hawksburn 1883-87 [1922]
 Anglican
 Edmund G. Ovey [A. & K. Henderson, Alsop & Martin]

Gothic-Polychrome/Polytexture: Full Polychrome
 A polychrome brick church designed by E.G. Ovey and built in 1883-87. The exterior is of particular interest for its elaborate diaper patterned brickwork and polychromatic voussoirs and the apse focussing upon a three-light window. The interior retains its timber fittings, stained glass and Fincham pipe organ of 1887. The crenellated tower was added in 1922.

- 5. Special Exterior Form or Treatment: three-light gabled apse window similar in treatment to Holy Trinity, Balaclava; elaborately patterned brickwork
- 8. Joinery, Furniture & Fittings: oak altar by Robert Prenzler, 1913
- 9. Organ: Fincham 1887



119. Church of Christ, 220-30 High Street, Prahran 1880s
 Church of Christ
 Architect unknown
 Classical: Pedimented
 A Church of Christ believed to have been built after 1880, making it one of the later examples of the classical pedimented Nonconformist church form.

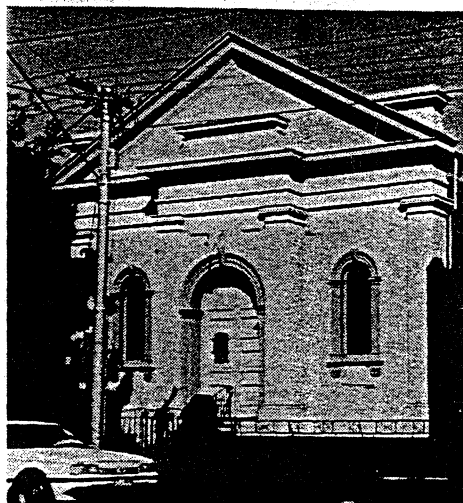

120. Baptist, 88 Koovong Road, Armadale 1898
 Baptist
 Sydney Smith
 Romanesque: Blood & Bandage

A church built in 1898 to the design of Sydney Smith in a very advanced style derived essentially from the Romanesque and characterised by the contrast of cement dressings against pressed red brick, though here also with dark brick diapering and chequerboard gables. The interior space is centralised, with ramped floor and fine timber furnishings, and now includes a Fincham organ originally made for the Baptist Church in East Melbourne.

- 8. Joinery, furniture & Fittings
- 9. Organ: Fincham 1877



121. Congregational, 250 Malvern Road, Prahran 1858
 Congregational
 Crouch & Wilson
 Later Gothic: Free Decorated

A bluestone church with cement detailing, built in 1858-59 to the design of Crouch & Wilson, the main façade incorporating a large three-light traceried window with flanking turrets, and a wooden porch to the right. The interior has aisles separated from the nave by wooden columns and a sloping floor. The important pipe organ was built by Frederick W. Nicholson of Bradford in about 1863 and retains its Gothic case and diapered façade pipes.

- 9. Organ: F.W. Nicholson, Bradford c.1863

